

IHRESS

PREMIUM PACKAGING MACHINERY



iP35AT

***Automatic case sealer
Single format***



Pol. Ind. La Serra
C. Camí de la caseta, 3-A | 08185 Lliçà de Vall (BARCELONA)
+34 936 555 600 | ihress.com | info@ihress.com

STANDARD TECHNICAL FEATURES

- Machine ready to be integrated in automatic line
- PLC control.
- End of seal reel warning
- Parameter setting screen
- Dimensional adjustment: Manual
- Carton sealing top and bottom.
- Carton dragging by side belts with independent motors
- Adjustable working height from 570 to 800 mm.
- Interchangeable taping head which allows using tape from 48mm to 72 mm width.


Dimensions of admissible boxes RSC or B1

- Largo: 150/400 - 700 mm*
- Ancho: 115 - 510 mm
- Alto: 150 - 500 mm


*The maximum length of the box will depend on its width, the maximum length being 700mm with 115mm wide boxes and 400mm with 510mm wide boxes.

Other dimensions on request (extra cost may apply).


The quality and format of the boxes must be verified and approved by the iHRESS technical office.

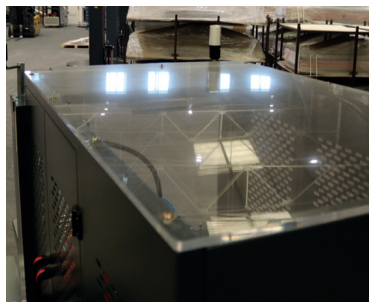

Sealing head

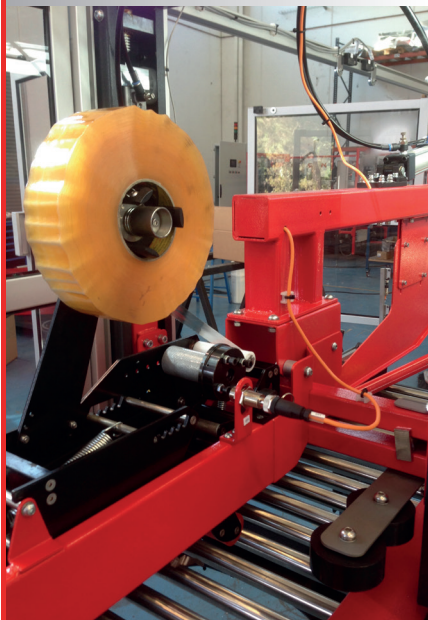


iP35AT

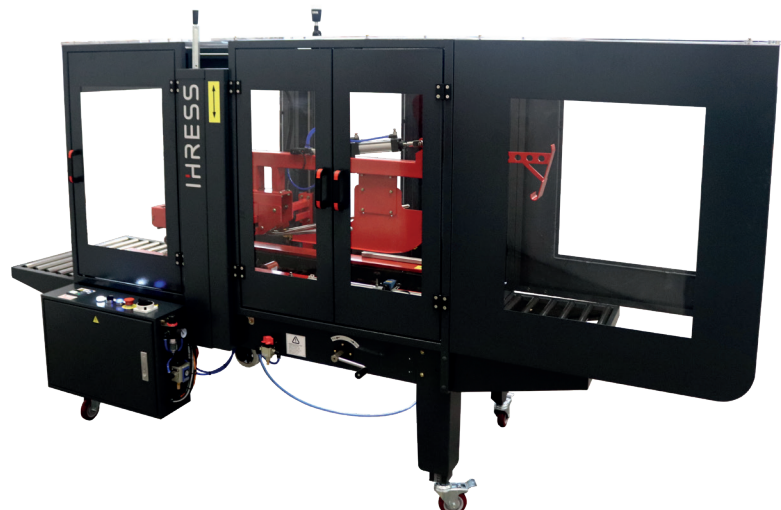

Technical features	Standard
Electric Power:	220 V 50 Hz Single phase
Installed power:	0,45 Kw
Air pressure:	6 bar.
Belts speed:	21 m/min.
Sealing of top and/or bottom flaps	Tape (48 to 72 mm)
Dimensional adjustment:	Manual

Standard main components	
PLC:	Siemens
Pneumatic components:	AIRTAC
Safety devices:	Limit switch: Tend
Hot-Melt equipment (optional)	Meler
Illuminated beacon	
Other components or brands on request may incur extra costs.	

Options
Stainless steel 304
Carton sealing top and/or bottom with Hot-Melt
Tape end detector with alarm
Conveyors of free rollers infeed/outfeed of different lengths
Motorized conveyors (rollers or bands) infeed/outfeed of different lengths
Other colors on request (can be extra cost)

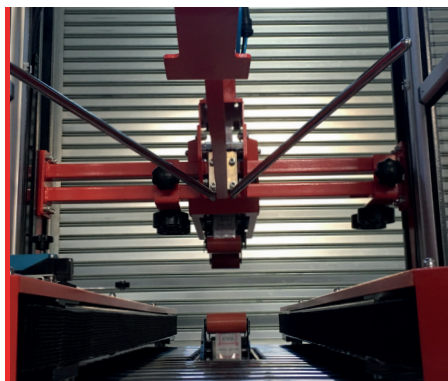

Hot Melt Seal (OPTION)



iP35AT standard

STANDARD MACHINE LAYOUT

