

IHRESS

PREMIUM PACKAGING MACHINERY



iBsm900

Automatic bag sealer



Pol. Ind. La Serra
C. Camí de la caseta, 3-A | 08185 Lliçà de Vall (BARCELONA)
+34 936 555 600 | ihress.com | info@ihress.com


STANDARD TECHNICAL CHARACTERISTICS

- Packing capacity: 8-10 boxes/minute.
- Sealing dimensions: 1000 mm
- LCD touch screen.
- Power: 220V (depending on user's needs)

Dimensions of the box

- Plastic bag size: 460 - 840 mm
- Equation for film length: Housing: $L + \text{Width} + 140 \text{ mm} = \text{Required film length}$

PROCESS

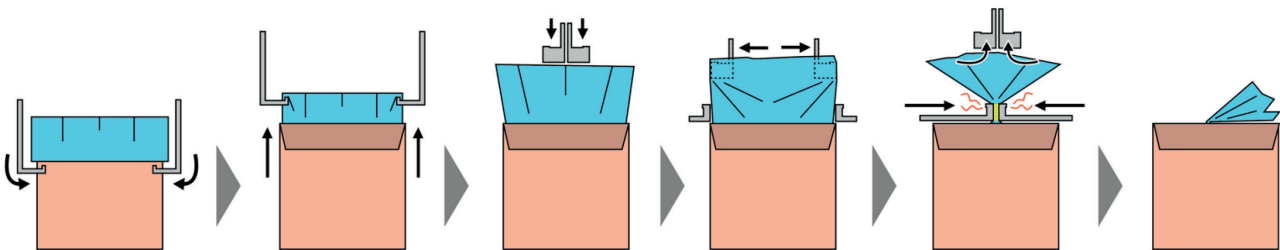

The bag sealer is recommended for sectors that require a high level of hygiene in their finishing lines such as frozen products, ready meals, agricultural products, oils, etc.

No smoke is produced during the closing of the bag which ensures a clean environment.

The machine can work independently or together with an inserting machine as a fully automatic production line. Available in stainless steel or painted steel.

Technical characteristics	Standard
Electrical power:	400 V 50 Hz
Installed power:	7 Kw
Air consumption:	30 litres/cycle

Machine dimensions	
Length:	2400 mm
Width:	1450 mm
Height:	2000 mm

Standard main components	
HMI:	LCD touch screen
PLC:	Mitsubishi
Pneumatic components:	SMC
Security	Omron
Other components or brands on request (may incur extra cost)	

Dimensions of the box	
Length:	300 – 400 mm
Width:	200 – 300 mm
Height:	190 – 310 mm
Production (Depending on format)	Up to 8 boxes/min.
*Depending on the quality, structure and dimensions of the boxes	

Options:	Inox 304
-----------------	-----------------