


IHRESS

PREMIUM PACKAGING MACHINERY

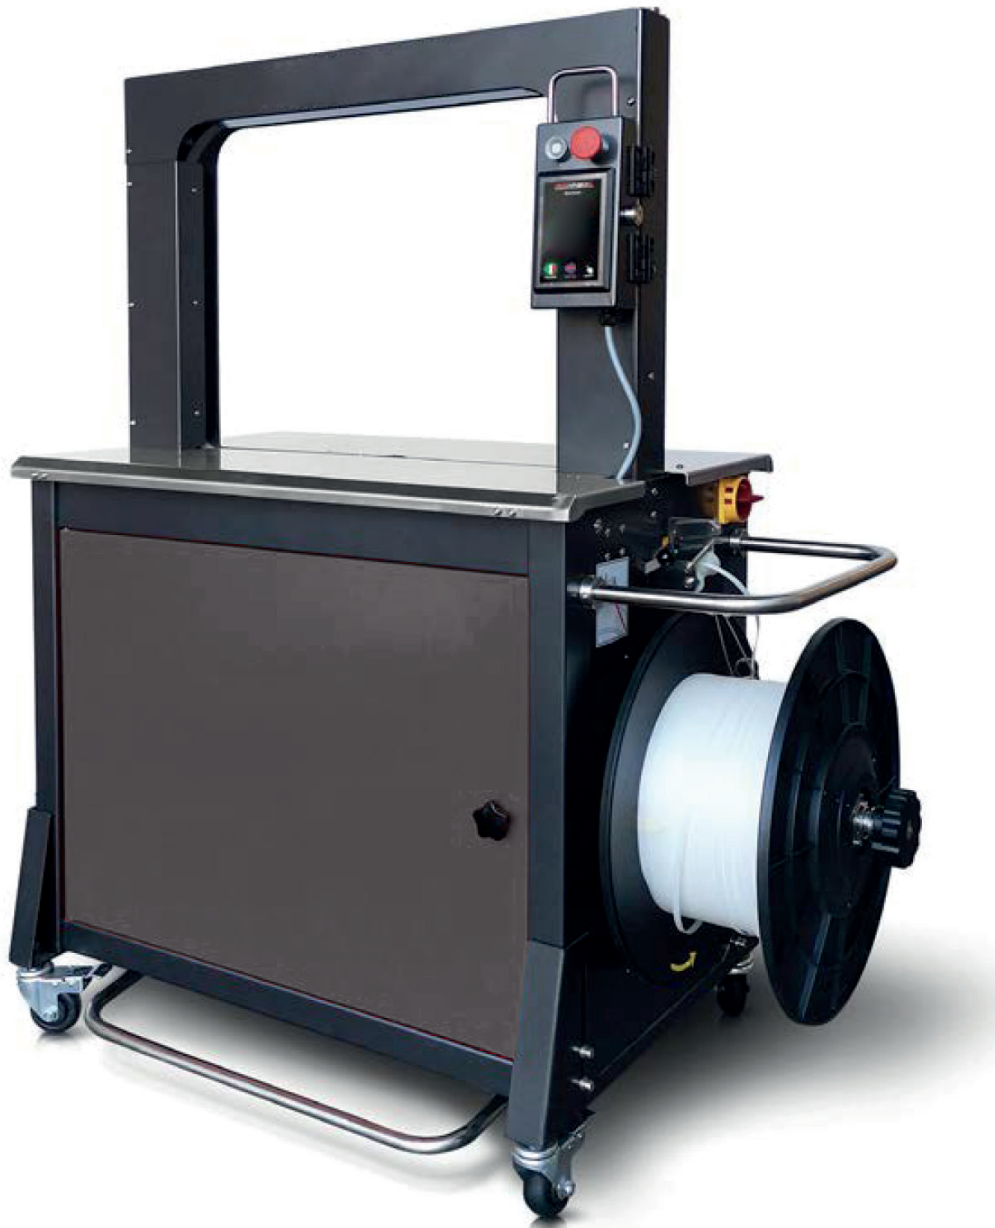

iFCM-655


Semi-automatic arch strapping machine



Pol. Ind. Can Turull - Naves 8 y 9
Carretera c-1413a Km. 35 | 08181 Sentmenat (ESPAÑA)
+34 936 555 600 | ihress.com | info@ihress.com

TECHNICAL FEATURES

- Stainless steel working table
- Stainless steel safety handle
- Magnetic safety switches
- Optical sensor on the working table for automatic strap feeding
- Strapping group with 24 volt vcc brushless motors
- Automatic strap loading
- Strap coil holder unlock by button
- Loop ejection
- 180° rotating touch screen control panel
- Strap cutter device
- Adjustable working table height
- Four pivoting wheels, two of them with brake
- Strapping foot pedal
- Emergency stop button
- Easyfast strap guide disassembly system (without any tool)
- Automatic strap ejection at the end of the strap coil
- Re-feed strap system
- Adjustable cooling time
- Various arches dimension available
- Digital adjustment of strap tensioning up to 45 kg

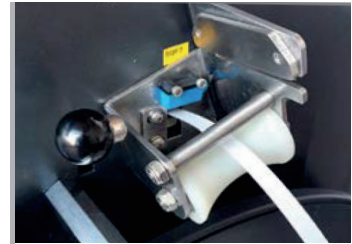

Automatic strap feeding strap cutter



Fast strap coil change



Touch screen control panel

Data Sheet	
Power supply	220 V 1 ph 50/60 Hz 0,70 kW
Machine dimension	L 1240 x W 630 x H 1460 mm.
Working table height	H 875 - 975 mm.
Arch size	L 650 x H 500 mm (Standard)
Strapping speed	65 cycles/min
Tension strength	0 - 45 KG
Net machine weight (Kg)	240 KG
Product Features	
Max. Product dimensions	L 600 x H 450 mm.
Max product weight	25 KG
Strap Roll Features	
Internal diameter	200 mm.
External diameter	400 - 500 mm.
Strap width	9 mm.
Strap thickness	0,45 - 0,65 mm.
Strap type	PP / PET

STANDARD MACHINE DIMENSIONS

